

Professional faucets



• Professional faucets. Standard range	198-210
– Pre-rinse units	199-200
– Single lever faucets	201
– Foot pedal faucets	201
• Professional faucets	202-210
– Pre-rinse units	203-205
– Single lever faucets	206-207
– Timed faucets	207
– Electronic faucets	208
– Foot pedal faucets	208
– Retractable hose reels	209
– Knee pedal faucets	210
– Accessories	210



Professional faucets. Standard range Pre-Rinse Units

Edesa Professional standard range of faucets stands out for its robustness, excellent finishing and certified durability. Since this range is specially designed for foodservice in professional and catering operations, all products are intended to help make kitchen staff daily work easier, more efficient and more pleasant.

Furthermore, this range is also defined by the quality and thickness of the materials employed, the appealing aesthetics of the finished products, and the savings achieved in water consumption. To sum up, a product designed for true foodservice professionals.

Stainless steel, flexible hose, with double interlocking covers for extended life. Hose has a transparent thermoplastic coating for maximum hygiene, which makes it extremely easy to clean. It is also certified for the transportation of liquid foodstuff, including potable water.

Spray valve in special plastic. Comply with most stringent international standards regarding chemical composition and toxicity. It includes chrome-plated brass trigger. Hold-down ring for constant water flow. Built-in check valve to prevent backflow of water. Finger hook for spray valve made of nylon, reinforced with fiberglass and stainless steel. Spray valve designed for uncompromising performance under intensive daily use in a professional kitchen. Water flow comes out of the spray valve in a concentrated, uniform manner. Progressive water flow control operated with a trigger, which helps saving water and money. The more the spray valve trigger is pressed, the more water flows out.

Stainless steel spring with external epoxy coating in blue, which inhibits corrosion and gives extra endurance and strength. Sealed ends to minimize friction between spring and flexible hose and prevent tears. Nylon wall bracket, reinforced with fiberglass and brass. The standard length is 115 mm.

Body in stainless steel, for a durable, corrosion-resistant construction. When not in use, stainless steel body provides maximum hygiene compared to traditional chrome-plated brass structures.

Add-on faucet as an option. When required, add-on faucet is always factory-installed, for maximum stability and perfect axial positioning.

Faucet designed for easy access to its parts, ensuring quick maintenance or replacement. All accessories for installation and flexible hoses for connection to water supply included as standard options.



All-brass body, thick chrome plating base faucets, to guarantee high quality and hardness. Proven quality for heavy-use opening and closing operations. Depending on the model incorporates ceramic cartridge or standard valve. Available with single levers or knob handles.

PROFESSIONAL FAUCETS. STANDARD RANGE Pre-Rinse Units



- Edesa Professional offers one the most comprehensive and suitable ranges of professional faucets in the market.
- Especially designed to meet the toughest kitchen requirements in professional environments such as restaurants, hotels, education, healthcare, business, food retail, etc.
- Stainless steel flexible hose with thermoplastic covering.

- Stainless steel spring with external epoxy coating in blue. Able to resist under high-temperature and high-pressure water conditions.
- Ergonomic spray valve design. It includes progressive water flow control operated manually by trigger, hold-down ring for constant water flow and built-in check valve to prevent backflow of water.
- High-density, thick chrome plating in all items.
- All accessories required for installation are included.
- Flexible hoses required for connection to water supply are included.

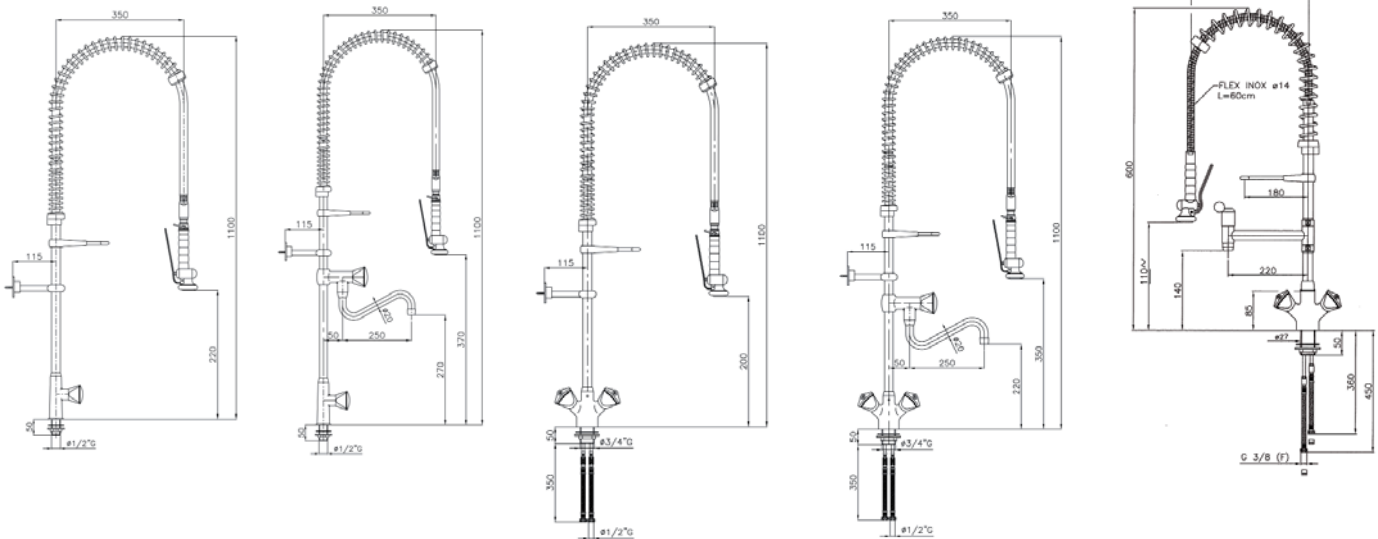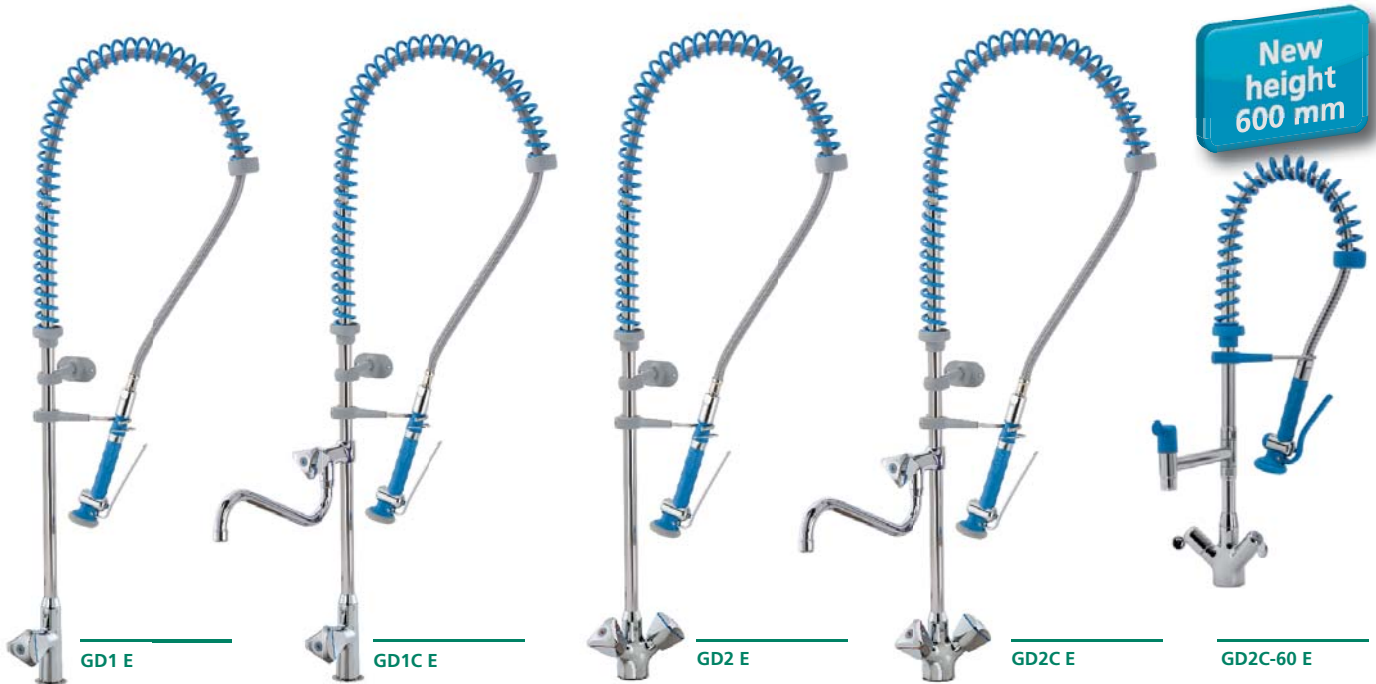

Model	Reference	Description
GD1 E	19003417	Pre-rinse unit, one-water connection
GD1C E	19018373	Pre-rinse unit with add-on faucet, one-water connection
GD2 E	19002818	Pre-rinse unit, two-water connection
GD2C E	19010881	Pre-rinse unit with add-on faucet, two-water connection
GD2C-60 E	19029264	Pre-rinse unit with add-on faucet, two-water connection. 60 mm height



Professional faucets. Standard range

Pre-Rinse Unit with Single Lever Base Faucet



Ergonomic, heat-resistant spray valve.



High-density, thick chrome plating.



Single lever base faucet.



GDM2 E







GDM2C E



GDM2CB E



GDM2C-60 E

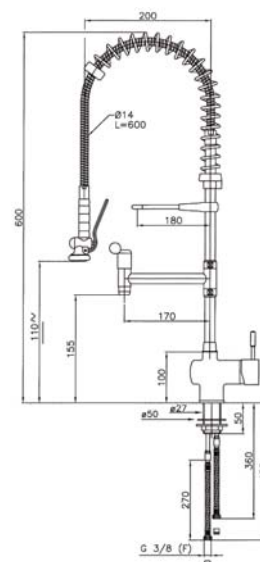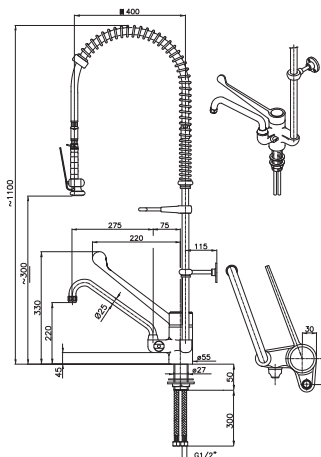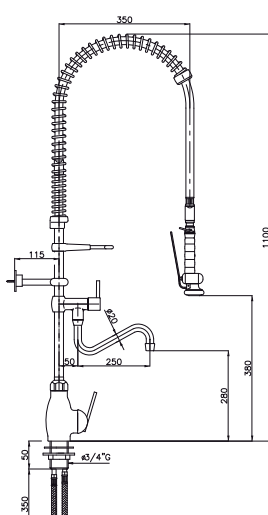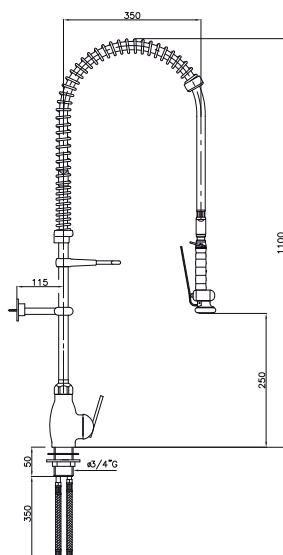


Model	Reference	Description
GDM2 E	19003416	Pre-rinse unit with single lever base faucet and knob add-on faucet, two-water
GDM2C E	19018374	Pre-rinse unit with single lever base faucet, two-water
GDM2CB E	19018375	Pre-rinse unit with single lever base faucet and single lever add-on faucet, two-water
GDM2C-60 E	19029265	Pre-rinse unit with single lever base faucet, two-water. 60 mm height

Professional faucets. Standard range Single Lever Faucets




- Sturdy and durable, they are especially suitable for professional kitchen operations.
- High-density, thick chrome plating and high-quality, tested components.


- All accessories required for installation are included.
- Flexible hoses required for connection to water supply are included too.
- Ergonomic design of the levers that facilitates opening and closing operations and thus reducing fatigue.

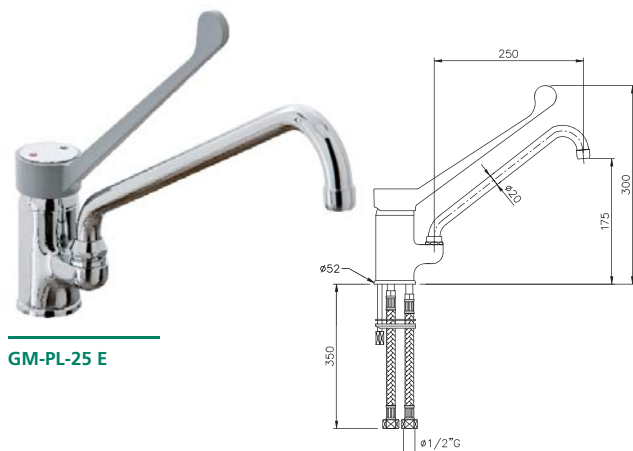

GM-PL-25 E

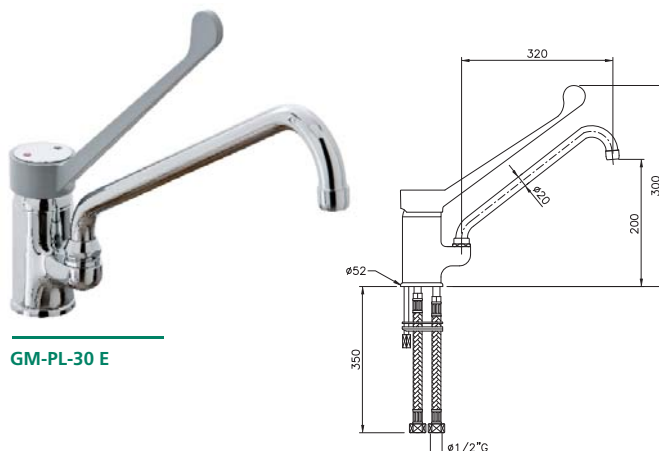


GM-PL-30 E

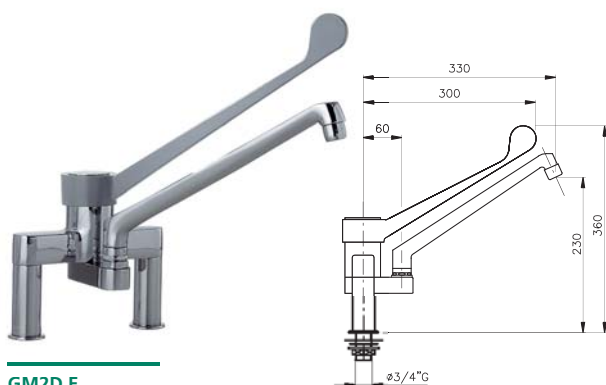


GM2D E



GB-30 E

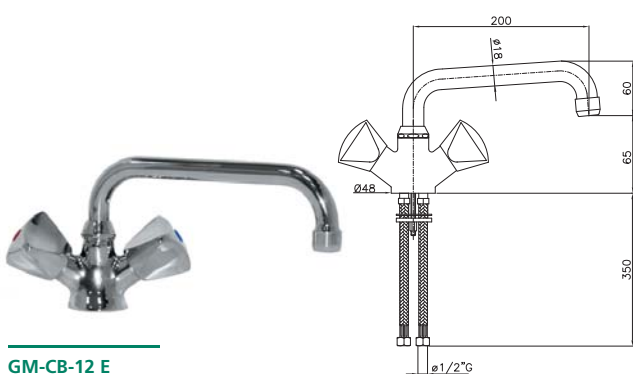

GM-CB-12 E

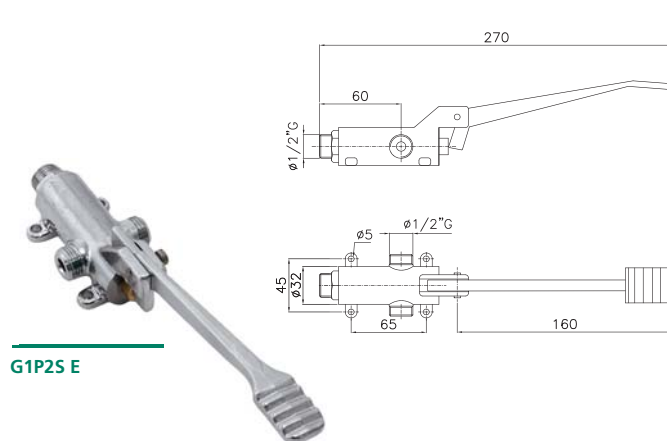


G1P2S E

Model	Reference	Description
GM-PL-25 E	19011242	Single lever faucet with Ø 20 mm, length 250 mm swing nozzle, two-water connection
GM-PL-30 E	19013872	Single lever faucet with Ø 20 mm, length 320 mm swing nozzle, two-water connection
GM2D E	19013873	Deck mount bridge, single lever faucet with 270 mm length swing nozzle, two-water connection
GB-30 E	19013587	Knob handle faucet with Ø 20 mm, length 300 mm swing nozzle, two-water connection
GM-CB-12 E	19003415	Knob handle faucet with Ø 18 mm, length 200 mm swing nozzle, two-water connection
G1P2S E	19002805	Floor-mount foot pedal two-water faucet



Professional faucets Pre-Rinse Units



- Edesa Professional offers one the most comprehensive ranges of professional faucets in the market.
- Especially designed to meet the toughest kitchen requirements in professional environments such as restaurants, hotels, education, healthcare, business, food retail, etc.
- Ergonomic design of the levers that facilitates opening and closing operations and thus reducing fatigue.
- High-density, thick chrome plating in all items.
- All accessories required for installation are included.
- Flexible hoses required for connection to water supply are included.

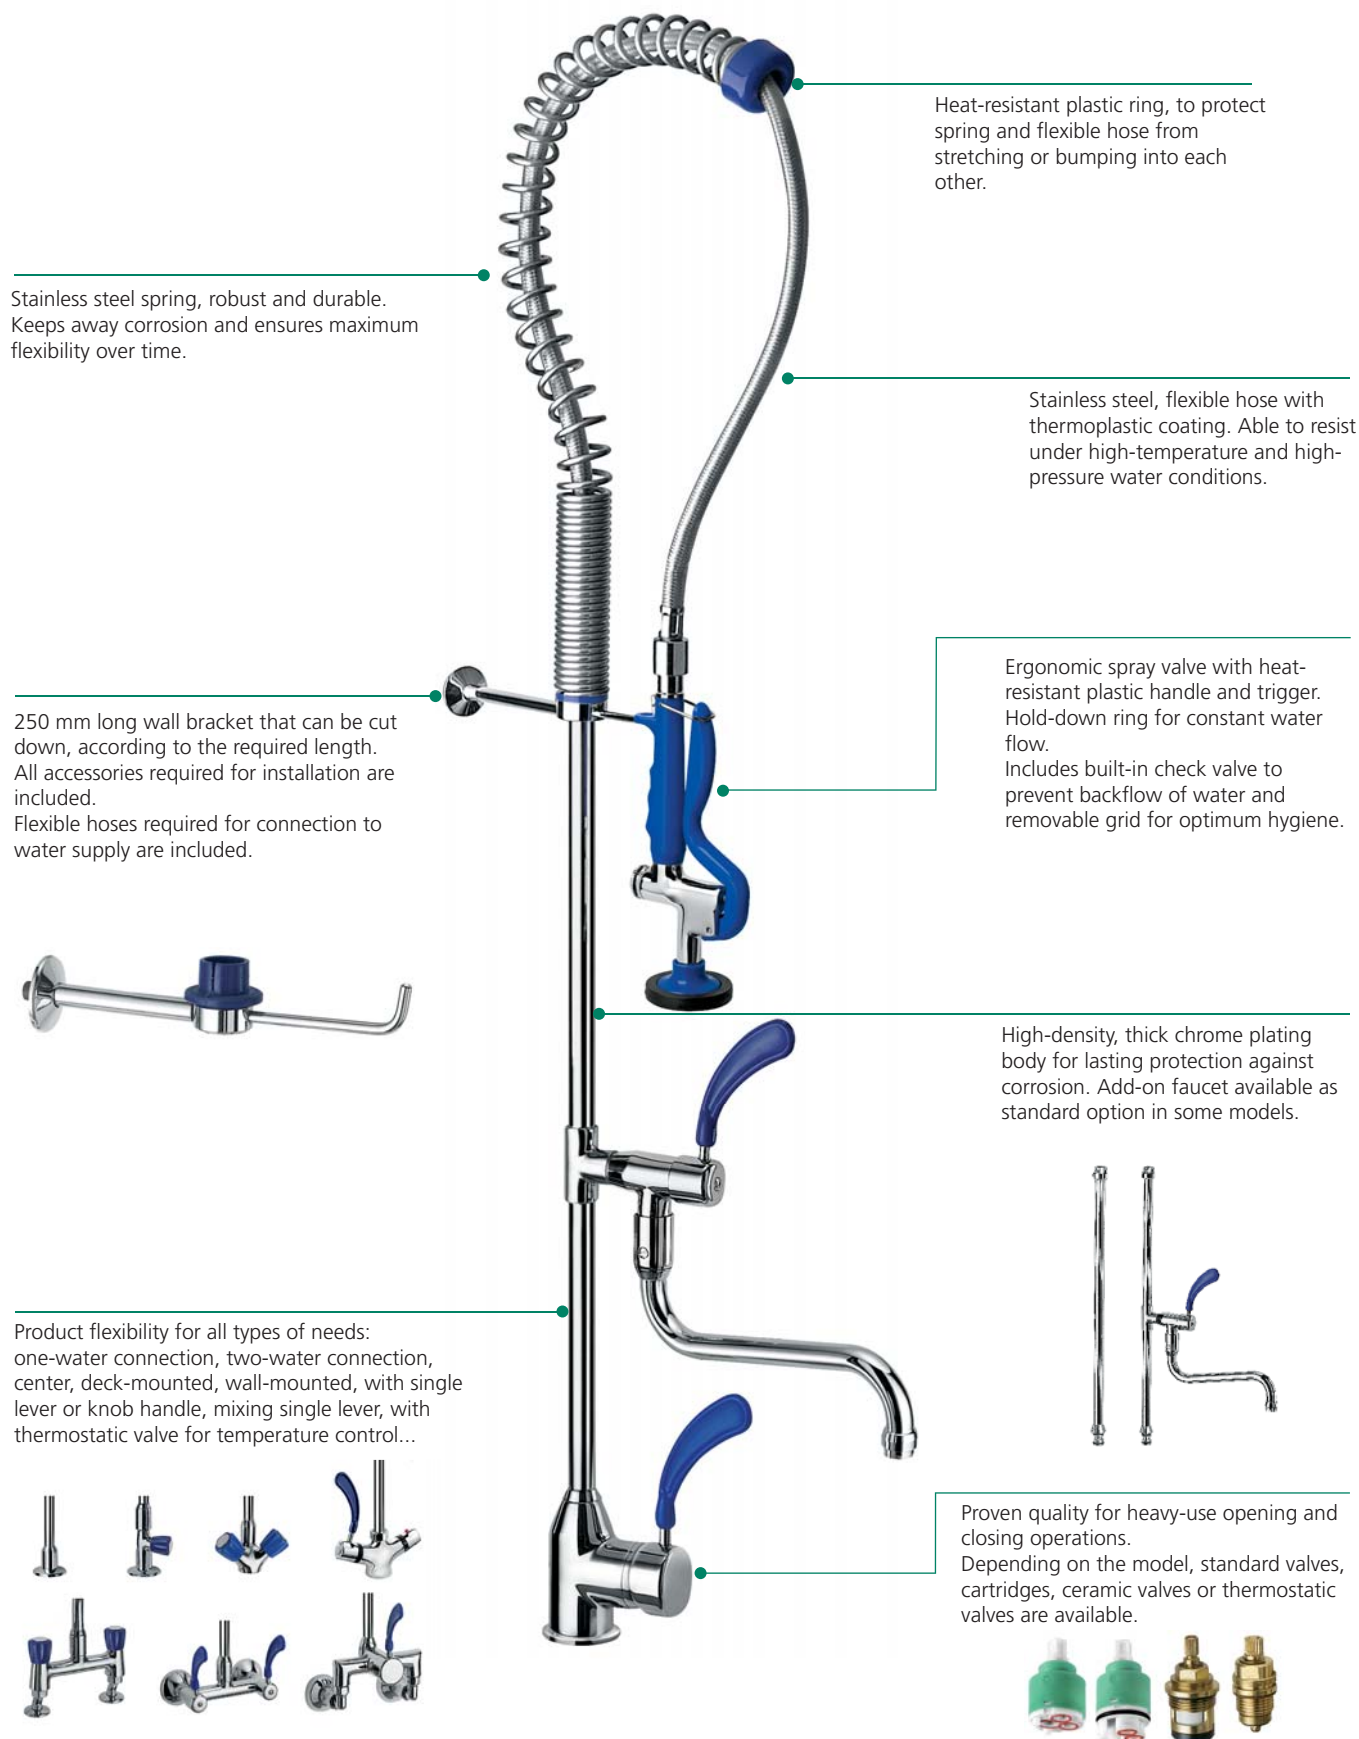



PRE-RINSE UNITS

- Especially designed to meet the toughest professional kitchen requirements.
- Stainless steel spring able to resist under high-temperature and high-pressure water conditions.
- Ergonomic spray valve design. It includes progressive water flow control, hold-down ring for constant water flow and built-in check valve to prevent backflow of water.
- High-density, thick chrome plating in all items.
- Faucets with solid chrome plating finishing and heat-resistant plastic levers.
- All accessories required for installation are included. Flexible hoses required for connection to water supply are included too.

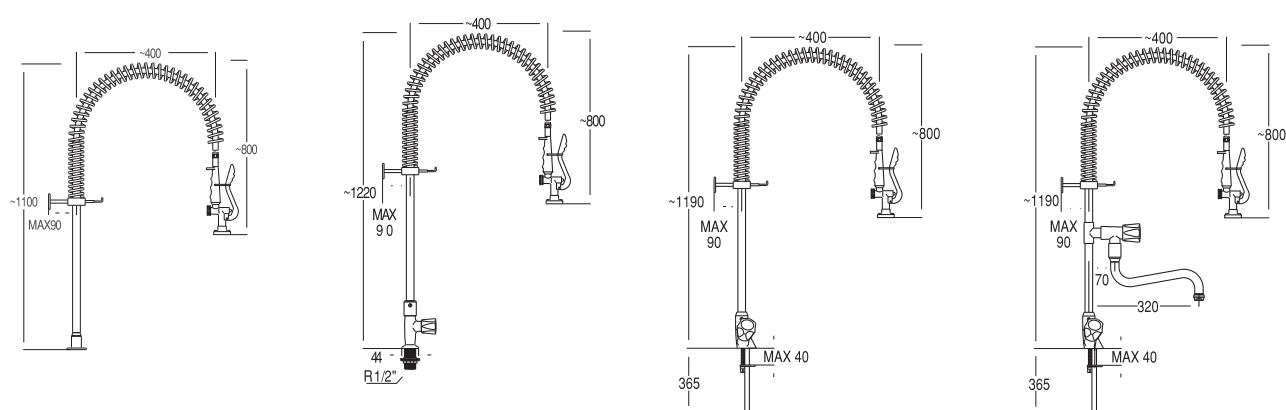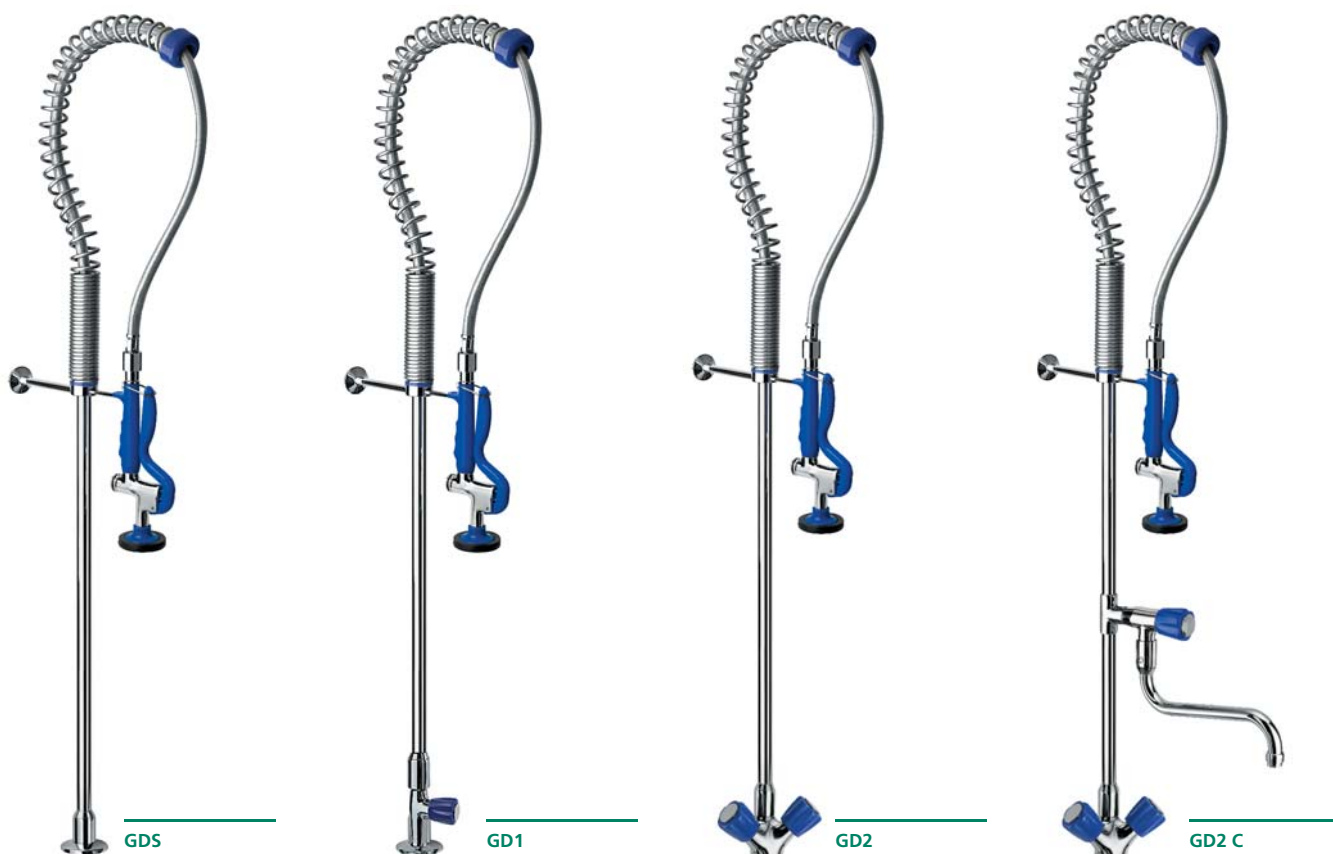

Model	Reference	Description
GDS	19002809	Pre-rinse unit with direct connection to one-water supply
GD1	19002808	Pre-rinse unit with base faucet, one-water connection
GD2	19002810	Pre-rinse unit with base faucet, two-water connection
GD2C	19002807	Pre-rinse unit with base and add-on faucet, two-water connection



Professional faucets Pre-rinse units



High-density, thick chrome plating.







Thermostatic valve for temperature control in model GDMT2C.



Add-on swing nozzle faucet.








GD2D models have adapters that make easier faucet and inlet alignment.

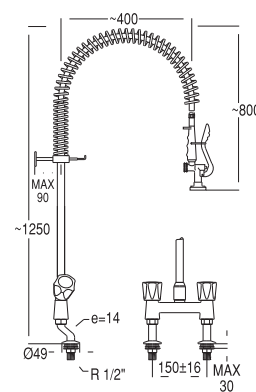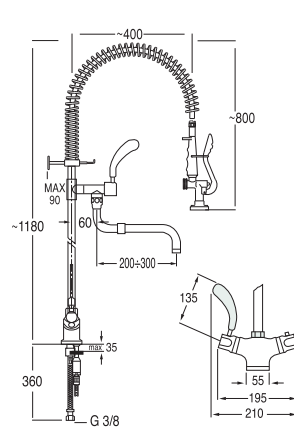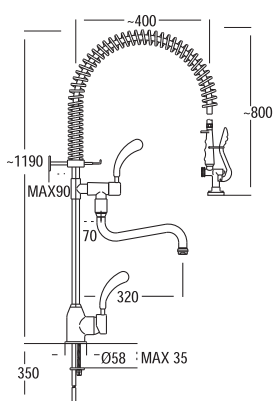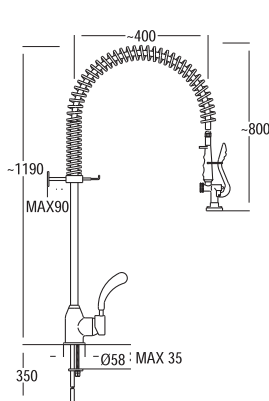

Model	Reference	Description
GDM2	19002811	Pre-rinse unit with single lever base faucet, two-water connection
GDM2C	19002812	Pre-rinse unit with single lever base and add-on faucets, two-water connection
GDMT2C	19002814	Pre-rinse unit with thermostatic, single lever base faucet and add-on faucet, two-water connection
GD2D	19002806	Pre-rinse unit with deck mount bridge base faucet and add-on faucet, two-water connection








- Wide product range, suitable for all types of needs.
- Faucets especially designed to fill kettles and cooking boiling pans.
- All accessories required for installation are included. Flexible hoses required for connection to water supply are included too.
- Models GDP2, GDP2C and GDPM2C have adapters that make easier faucet and inlet alignment.

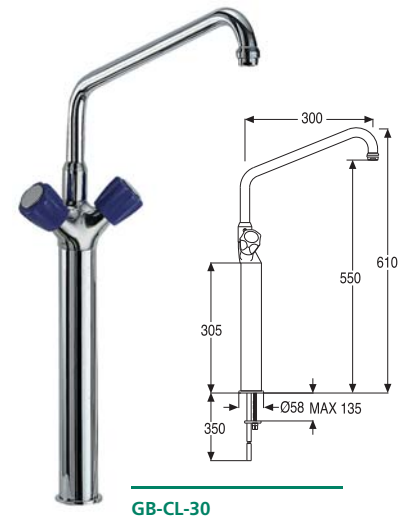

Model	Reference	Description
GDP2	19002813	Pre-rinse unit with wall mount, double lever base faucet, two-water connection
GDP2C	19002833	Pre-rinse unit with wall mount, single lever base faucet and add-on faucet, two-water connection
GDPM2C	19002832	Pre-rinse unit with wall mount, double lever base faucet and add-on faucet, two-water connection
GB-CL-30	19002819	Elevated swing nozzle faucet with 360° rotation. 300 mm high, Ø 50 mm base faucet
GB-CL-70	19002803	Elevated 90° swing nozzle




-

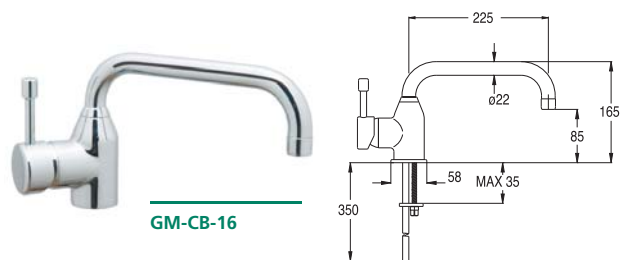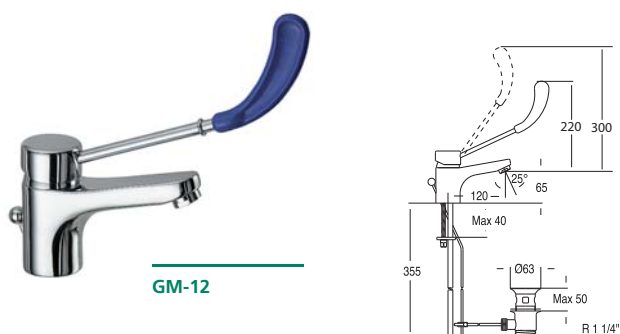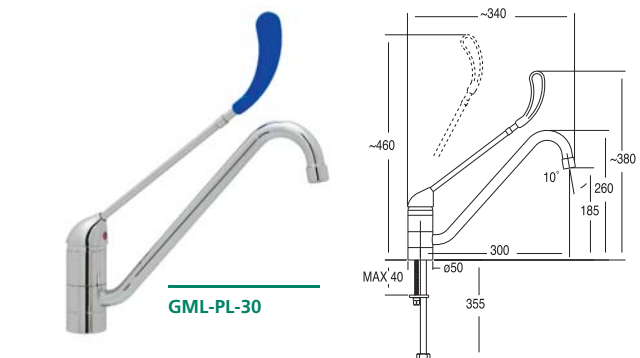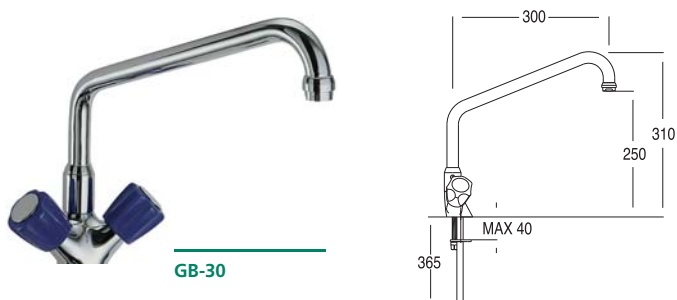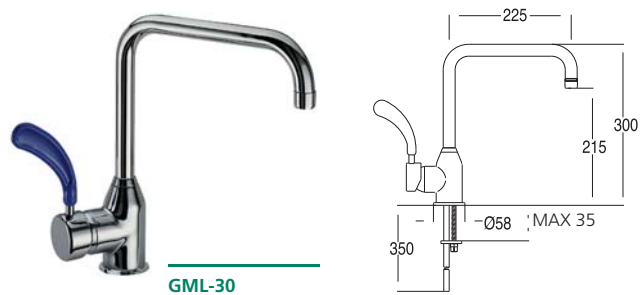206 | edesa



GM2DEX




GDHM2




Flexible hose of 1,000 mm long, to be used for different applications such as cleaning, filling, etc.




GD-30




GM1-30




G1T-23



G2P-30

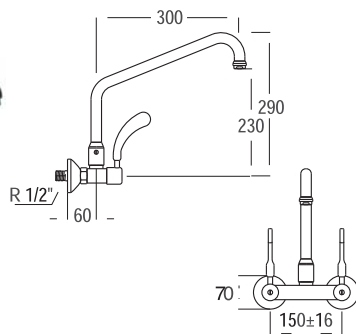

GMP-30



Model	Reference	Description
GM2DEX	19002831	Side single lever faucet with extendable spray with two-water connection
GD-30	19002821	Deck mount bridge, knob faucet with two-water connection. 360 ° swing nozzle, Ø 22 mm
GDHM2	19010667	Front single lever faucet with two-water connection and 1,000 mm long, wall-mounted hose
GM1-30	19002830	Front single lever faucet with one-water connection. Swing nozzle
G1T-23	19002836	Timed faucet operated by pushbutton handle. Automatic flow of water during 8-12 seconds
G2P-30	19002834	Wall mount, double lever faucet with two-water connection. Swing nozzle
GMP-30	19002820	Wall mount, long single lever faucet with two-water connection. 180 ° swing nozzle, Ø 22 mm




- Automatic operation through an infrared (IR) sensor, for opening and closing without manual contact.
- Designed for highest hygiene standards and more convenience, no pedals are required.
- High-security, vandal-resistant sensor system, which is also easy to replace.
- IP65 water-proof operation box.
- Electro-valve is automatically closed, in case of absence of electricity or exhausted battery.
- Automatic rinsing system, to avoid bacterial proliferation. The unit is automatically operated during 1 minute every 24 hours after the last operation, in order to rinse water ducts.



Activated by the presence of hands within the detection range.
Stopped when hands are taken away from the detection range.


12 cm

Easily removable LED holder

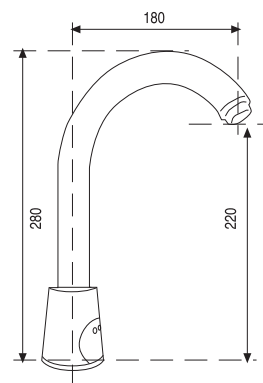



Activated when users wave their hands within the detection range. Stopped when hands are waved again. If hands are not waved again, it stops automatically in 45 seconds.

- When pressing the food pedal, cold water is supplied. If food pedal is kept pressed, mixed water with progressively higher temperature is supplied.
- By releasing the foot pedal, water keeps on being supplied until the blocking pedal to the right is pressed, cutting off the water flow.
- Water flow regulator.



G1P1S

- One-water foot pedal.
- Floor or wall-mounted.

208 | edesa



RETRACTABLE HOSE REELS

- Especially designed to be installed in food-processing industries (meat, fish, vegetables, etc.), professional kitchens, catering companies, etc.
- Enclosed reel structure, arms and wall brackets made of stainless steel.
- Professional-grade, compact, long-life, heat-resistant black rubber hose approved for foodservice applications.
- Retractable, spring-driven hose, with ratcheting system that effortlessly holds the length of hose.
- Connection to the water supply with a 90 °C coupling, 1/2" nipple and check valve to prevent backflow of water.
- Internal mainspring with adjustable tension.
- Swing bracket that enables a wide operational range (up to 180° in Model GX-60, and up to 330 °C for Models GX-100 and GX-150), decreases stress and tension in the hose and gets full access from the connection point.
- Front trigger water gun with adjustable or continuous flow of water functions. Made of high-quality plastic, with an ergonomic design.
- Models GX-100 and GX-150 include, as a standard option, a 45 cm extension unit that can be assembled to the water gun in order to gain access to difficult points and to reduce user's physical effort.
- Operating temperature is 60 °C for 4 bar and 40 °C for 6 bar.




GX-100



45-cm extension unit included as a standard option in GX-100 and GX-150.



GX-60




GX-150 is wall or ceiling-mounted.




Front trigger water gun with extension unit assembled.




Water flow is regulated easily.

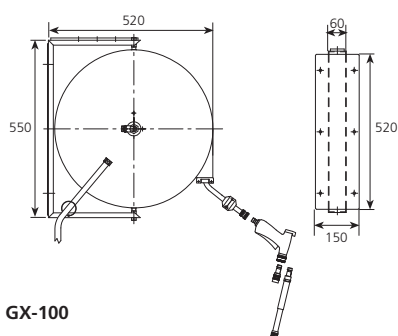

GX-100

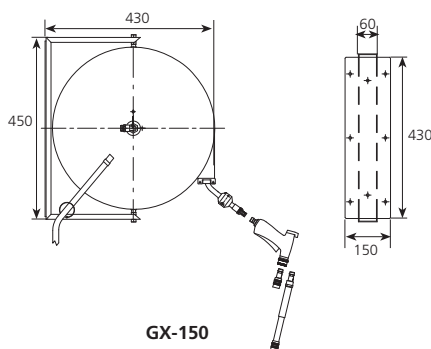

GX-150

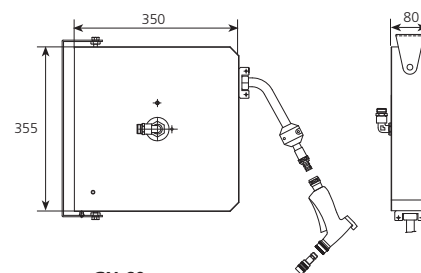

GX-60


Model	Reference	Work radius	Maximum length of tube (mm)
GX-60	19002817	90° + 90°	6000
GX-100	19002815	165° + 165°	10.000
GX-150	19002816	165° + 165°	15.000




Professional faucets

Knee pedal faucets, accessories and display stand

KNEE PEDAL FAUCETS

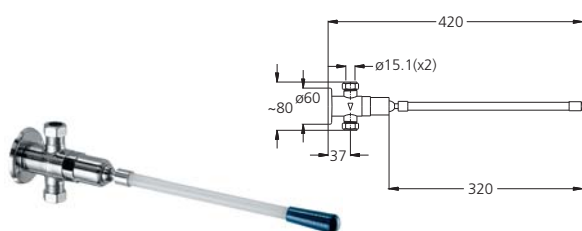

G1R1

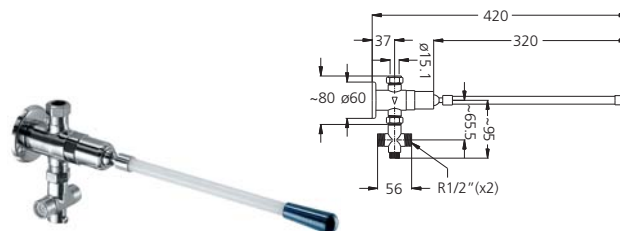

G1R2

Model	Reference	Description
G1R1	19002799	Knee pedal, one-water faucet with timed flow valve and automatic shut-off
G1R2	19002800	Knee pedal, two-water faucet with timed flow valve and automatic shut-off



GR-GDH



GR E



GR



GX-P



CL-20



FX-GDH



FX-100



GX-L



G1T2

Model	Reference	Description
GR-GDH	19000885	Spray valve for GDHM2. G 1/2" screw connection
GR E	19018656	Spray valve with ergonomic design. Progressive water flow, hold-down ring and built-in check valve. G 1/2" screw connection
GR	19000886	Spray valve. Progressive water flow, hold-down ring and built-in check valve. G 1/2" screw connection
GX-P	19004422	Spray gun for retractable hose reel systems
CL-20	19000417	Nozzle for handwash basins. G 1/2" screw connection
FX-GDH	19010936	Flexible hose for GDHM2. G 1/2" screw connection
FXI-100	19001117	Flexible stainless steel hose for pre-rinse units. 1,000 mm length. G 1/2" screw connection
GX-L	19003004	45 cm extension unit that can be assembled to the spray gun.
G1T2	19002798	Pushbutton, timed flow valve with automatic shut-off after preset time

Aluminum and polyethylene shelving



• Aluminum and polyethylene shelving	212-227
– Shelf Plates and Shelving Posts	212-214
– Accessories	215-216
– Shelving Planning and Configuration	217
• Modular aluminum and polyethylene shelving	
– Reference table	218-219
– Breakdown of shelving sets	220-221
• Edesa Shelving planner	224
• Stainless steel shelving	225
• Wall shelving	226
• Fixed shelving	227